


## TBM, RACS, DF & S/B IMPREGNATED FLAP WHEELS

These wheels are normal flap wheels that have been impregnated with a special mixture of resins that weld the single flaps to each other.

This particular process allows for a more compact wheel, which increases efficiency and improves the tightness of the machined profile. The impregnation does not affect the general characteristics of the flap wheels, therefore they keep their properties of flexibility and elasticity.

The wheels are available in different densities to satisfy every working needs.

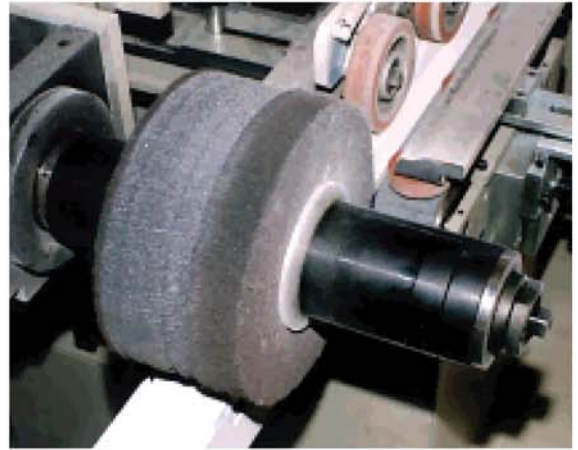

### APPLICATIONS

#### WOOD AND PAINT

These wheels are used on all types of woods, MDF, veneers and various kind of paints. The impregnated flap wheels are useful in many applications for buffing of UV and Acrylic (Water Base) paints when the thickness of paint is more consistent, and it's necessary to apply a more efficient and aggressive cutting.

STANDARD PRODUCTION		
PRODUCT REFERENCE	COLOUR	GRAIN
<b>ALUMINIUM OXIDE</b>		
TBM/A FINE	Brown	240
TBM/A VERY FINE STRONG	Brown	320
S/B A VERY FINE	Red Brownish	320
<b>SILICONE CARBIDE</b>		
TBM/S FINE	Dark Grey	240
TBM/S VERY FINE	Dark Grey	320
TBM/S SUPER FINE	Dark Grey	400
TBM/S ULTRA FINE	Dark Grey	600 - 1000 - 1200
S/B S VERY FINE	Dark Grey	320
S/B S SUPER FINE	Dark Grey	400
<b>OTHER MATERIALS</b>		
RACS GREEN	Green	320
DF/GREEN	Green	320
DF/NCS	Neutral Grey	320
DF/GREY	Grey	240
DF/NOA	Neutral Brown	240

STANDARD DIMENSIONS	
OUTER Ø	200
INNER Ø	76

AVAILABLE DENSITIES	
5	IMP.
8	IMP/O
10	IMP/D

